Technical data

Appliance type	Colour/ Housing	Exterior dimensions in cm (h/w/d)	Interior dimensions in cm (h/w/d)	Gross Capacity in litre 0.75 l *	max. Bordeaux bottles	Temperature zones	Energy consumption kWh/24h **	Gross weight in kg	Net weight in kg	Connection rating Ampere	Climate rating ***
The Vinidor range											
WTes 4677 with tinted glazed door	Stainless steel	185.5/66/67.1	160.1/53.3/48.9	430	143	3	1.1	121	114	2.0 A	SN-ST
WT 4677 with tinted glazed door	Tinto/steel	185.5/66/67.1	160.1/53.3/48.9	430	143	3	1.1	122	116	2.0 A	SN-ST
WTes 1753 with tinted glazed door	Stainless steel	85/59.7/58.6	68.1/51/42	136	40	2	0.7	60	57	0.9 A	SN-ST
WTUes 1653 with tinted glazed door	silver/stainless steel door	82–87/60/ min. 58	64/51/42	127	38	2	0.7	56	53	1.0 A	SN-ST
WTEes 2053 with tinted glazed door	silver/stainless steel door	122.1–122.5/ 56–57/min. 55	110.5/45.5/40.6	195	64	2	0.6	69.6	66.1	1.2 A	SN-ST
WTI 2050 door-on-door system	silver/steel	122–123.6/ 56–57/min. 55	110.5/45.5/40.1	195	64	2	0.5	49.6	46.6	1.2 A	SN-T
GrandCru multi-temperature wine cabinets											
WTes 4177 with tinted glazed door	Stainless steel	165.8/66/67.1	142/51.3/48.9	409	173	6	0.7	86	81	1.2 A	SN-ST
WT 4177 with tinted glazed door	Tinto/steel	165.8/66/67.1	142/51.3/48.9	409	173	6	0.7	88	82	1.2 A	SN-ST
WTes 4176	Stainless steel	165.8/66/67.1	142/51.3/48.9	396	173	6	0.5	67	61	1.0 A	SN-ST
WT 4176	Tinto/steel	164.4/66/67.1	146.5/51.3/48.9	401	182	6	0.5	68	63	1.0 A	SN-ST
Vinothek multi-temperature wine cabinets											
WT 4127 with tinted glazed door	Tinto/steel	165.8/66/67.1	142/51.3/48.9	409	173	6	0.8	87	81	1.2 A	SN-ST
WT 4126	Tinto/steel	164.4/66/67.1	146.5/51.3/48.9	401	182	6	0.6	68	62	1.0 A	SN-ST
GrandCru wine storage cabinets											
WK 6476	Tinto/steel	193/74.7/78.6	170/61.5/56	666	312	1	0.4	99	91	2.0 A	SN-T
WK 4677 with tinted glazed door	Tinto/steel	185.5/66/67.1	161.5/51.3/48.9	462	187	1	0.6	98	89	1.2 A	SN-ST
WK 4676	Tinto/steel	184.1/66/67.1	166/51.3/48.9	453	193	1	0.3	74	68	1.2 A	SN-T
WKes 4177 with tinted glazed door	Stainless steel	165.8/66/67.1	142/51.3/48.9	403	162	1	0.6	86	80	1.2 A	SN-ST
WK 4177 with tinted glazed door	Tinto/steel	165.8/66/67.1	142/51.3/48.9	403	162	1	0.6	88	82	1.2 A	SN-ST
WKes 4176	Stainless steel	165.8/66/67.1	146.5/51.3/48.9	390	162	1	0.3	66	60	1.0 A	SN-T
WK 4176	Tinto/steel	164.4/66/67.1	146.5/51.3/48.9	395	168	1	0.3	68	62	1.0 A	SN-T
WK 2977 with tinted glazed door	Tinto/steel	126.4/66/67.1	102.5/51.3/48.9	285	108	1	0.5	71	66	1.0 A	SN-ST
WK 2976	Tinto/steel	125/66/67.1	107/51.3/48.9	281	114	1	0.3	57	53	1.0 A	SN-T
WK 1853 with tinted glazed door	Tinto/steel	85/59.7/58.6	68/51/43.5	153	59	1	0.5	55	52	1.0 A	SN-ST
WKUes 1753 with tinted glazed door	silver/stainless steel door	82–87/60/ min. 58	64/51/43.5	144	59	1	0.5	53	50	1.0 A	SN-ST
WKes 653 with tinted glazed door	Stainless steel	61.2/42.5/47.8	37/35/31	56	12	1	0.3	33	32	0.5 A	SN
WKEes 553 with tinted glazed door	silver/stainless steel door	45/56/min. 55	34/46/31	48	18	1	0.4	31	30	0.5 A	SN
Vinothek wine storage cabinets											
WK 4127 with tinted glazed door	Tinto/steel	165.8/66/67.1	142/51.3/48.9	403	162	1	0.8	87	81	1.2 A	SN-ST
WK 4126	Tinto/steel	164.4/66/67.1	146.5/51.3/48.9	395	168	1	0.6	67	62	1.0 A	SN-T
WK 2927 with tinted glazed door	Tinto/steel	126.4/66/67.1	102.5/51.3/48.9	285	115	1	0.7	71	67	1.2 A	SN-ST
WK 2926	Tinto/steel	125/66/67.1	107/51.3/48.9	281	119	1	0.6	54	50	1.0 A	SN-T
WK 1802 with tinted glazed door	Tinto/steel	88.9/60/60.5	73.5/51.3/44.1	174	68	1	0.7	47	45	1.0 A	N-ST
WK 1806	Tinto/steel	88.9/60/60.5	73.5/51.3/44.1	174	68	1	0.6	38	35	1.0 A	SN-T
Wine cabinets for presenting and serving wine by the glass, wine storage cabinet and under-worktop appliance											
GWTes 4677 with tinted glazed door	Stainless steel	185.5/66/67.1	160.1/53.3/48.9	430	117	3	1.1	122	115	2.0 A	SN-ST
GWT 4677 with tinted glazed door	Tinto/steel	185.5/66/67.1	160.1/53.3/48.9	430	117	3	1.1	125	119	2.0 A	SN-ST
GWTes 4577 with tinted glazed door	Stainless steel	185.5/66/67.1	164.5/53.3/48.8	486	112	2	0.8	120	114	2.5 A	SN-ST
GWT 4577 with tinted glazed door	Tinto/steel	185.5/66/67.1	164.5/53.3/48.8	486	112	2	0.8	122	115	2.5 A	SN-ST
GWK 6476	Tinto/steel	193/74.7/78.6	170/61.5/56	666	312	1	0.4	104	95	2.0 A	SN-T
GWUes 1753 with tinted glazed door	silver/stainless steel door	82–87/60/ min. 58	64/51/43.5	144	36	1	0.5	54	51	1.0 A	SN-ST

* Maximum NORM-Bordeaux bottle capacity (0.75 l), depending on bottle shape and size ** at +20°C ambient temperature and + 12°C internal temperature on average

*** Ambient temperature: SN from +10 °C to +32 °C, N from +16 °C to +32 °C, ST from +16 °C to +38 °C, T from +16 °C to +43 °C

Liebherr Coolectric LTD, Interchange Point, Renny Park Road, Newport Pagnell, Bucks, MK16 0HA
National Salesline 08444 122655 • National Free Fax 0800 197 6591
Email sales@coolectric.co.uk • Web www.liebherr.com

Mixed Sources

Subject to modification. Printed in Germany by MZA. 0069/3.0/02.10

Wine Special 2010

LIEBHERR

Design, Quality and Innovation

Savour wine at its best

It doesn't matter whether we're talking about wine production, storage or tasting, the right temperature is crucial. It's a vital factor. Not only for growing the grapes, for producing, maturing and storing the wine but, first and foremost, for the flavour. The temperature at which a wine is served is essential for savouring the flavour at its very best.

Wine

The perfect range for wine connoisseurs

It is only under ideal conditions that a good wine can develop into a really excellent vintage and maintain its long-term value. For this, the technically advanced wine storage cabinets and multi-temperature wine cabinets from Liebherr are the perfect solution. Incorporating the latest climate technology, they provide precisely the right conditions for wines to mature in peace and reach their peak of flavour. Including a state-of-the-art electronic control system, unique compressors and a host of thoughtfully designed features, such as the activated charcoal filter and the special glass doors for essential UV protection, these appliances are specifically tailored for storing your wine in the optimum conditions.

The Vinidor range

The Vinidor range combines all the advantages of wine storage cabinets and multi-temperature wine cabinets in one appliance. This range offers two or three wine compartments in which the temperature can be individually set to exactly the degree required. This means that, for instance in the WT 4677, red wine, white wine and champagne can be kept at their individual ideal serving temperatures in the same appliance. These cabinets also provide the facility to set the ideal temperature for storing large quantities of wine over the longer term. The wine compartments vary in size to accommodate any personal selection and variety of wines.

Vinidor

The multi-temperature wine cabinets

Multi-temperature wine cabinets are especially suited for storing different types of wine at their respective drinking temperatures. These appliances incorporate a special climate control system that can layer the temperatures. In the upper zone, for example, red wine can be kept at +18 °C while the lower zone, set at an ambient temperature of +5 °C, will be particularly suitable for sparkling wine or champagne.

GranCru

Vinothek

The wine storage cabinets

Wine storage cabinets are the ideal choice for storing a larger wine collection over the long-term. Additionally, these appliances are perfectly suited for keeping larger quantities at drinking temperature. The temperature selected is maintained at a uniform, constant level throughout the interior of these wine storage cabinets.

GranCru

Vinothek

Innovative, exclusive and versatile: The Vinidor range

Depending on model size, the technically advanced appliances in the Vinidor range have two or three wine compartments allowing independent temperature settings. The appliances can be set in the temperature range of +5 °C and +20 °C to exactly the degree required in each of the compartments.

All the Vinidor appliances feature an innovative LED lighting concept. There is LED lighting in each temperature zone, integrated in the ceiling and in the insulation plates. This advanced technology ensures uniform illumination of the complete interior. Since any heat generated by the LEDs is minimal, wines can be presented, bathed in light, for a longer time period.

The WTes 1753 and WTUes 1653 represent an innovative solution for your storage requirements. For example, the control unit is incorporated into the insulation plate. The zones above and beneath this plate can be set independently of each other to two different temperatures ranging from +5 ºC to +20 ºC. Red or white wine, can be stored together or separately, as you choose, at ideal drinking temperatures in this appliance.

The path to complete wine pleasure

The responsibility for the quality of the wine does not stop with the wine storage. As a wine consumer you too will want to handle your wine carefully; especially if you want to provide the full benefit to both yourself and your guests. You need to know how to properly store your wine and how it is to be correctly served. For example, it is worthwhile, to decant strong red wines into a carafe before serving; particularly if they are to be enjoyed while they are young. The contact area of the wine with air is greater in the carafe than in the bottle. This means, the wine “saturates” with oxygen so that it is positively changed and any possible sullying of the aroma rapidly disappears. Older red wines are decanted in order to separate the sediment that has settled at the bottom of the bottle from the rest of the wine. A lighted candle placed under the bottle neck helps reveal this sediment. Most important, however, is to ensure that your wine is at the right serving temperature. White wines are best enjoyed when they are cold. And room temperature as a measure for a red wine is long since passé. Even heavy wines should not be served at temperatures of more than +20 °C; a temperature of +18 °C is even better. Only then will the flavour and refinement show to their very best.

Vinidor range
- Ideal climate conditions in each compartment thanks to forced air cooling and fresh air supply via activated charcoal filter
- Electronic control in the insulation panels
- Door and temperature alarm
- Digital temperature display which can be read from the outside
- Child Lock function
- Variable humidity control
- Dimmable LED interior light with separate switch
- Pull-out wooden shelves on telescopic rails
- Vibration-free compressors
- Reversible doors

WT(es) 4677 Vinidor
- 3 temperature zones, each separately adjustable between +5 °C and +20 °C
- Elegant slimline handle in the colour of the housing with integrated opening mechanism
- High-quality SwingLine design
- Tinted glazed door
- Frame of glass door in the colour of the housing

WTes 1753 Vinidor
- 2 temperature zones, each adjustable between +5 °C and +20 °C
- Tinted glazed door with high-quality stainless steel frame
- Stainless steel handle

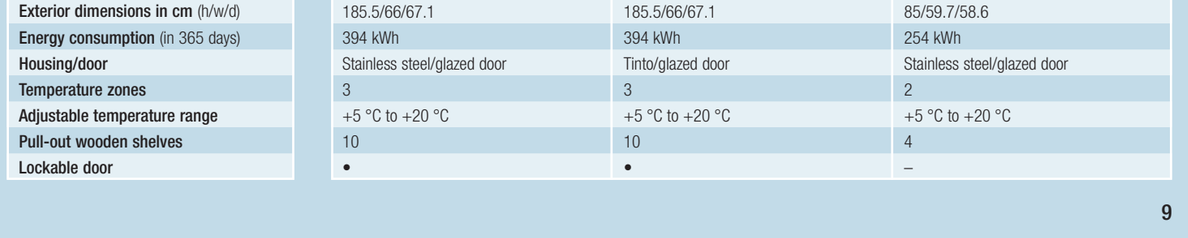

The Vinidor-Range	WTes 4677 Vinidor	WT 4677 Vinidor	WTes 1753 Vinidor
Gross capacity	430 litre	430 litre	136 litre
0.75 litre bordeaux bottles, up to	143	143	40
Exterior dimensions in cm (h/w/d)	185.5/66/67.1	185.5/66/67.1	85/59.7/58.6
Energy consumption (in 365 days)	394 kWh	394 kWh	254 kWh
Housing/door	Stainless steel/glazed door	Tinto/glazed door	Stainless steel/glazed door
Temperature zones	3	3	2
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C	+5 °C to +20 °C
Pull-out wooden shelves	10	10	4
Lockable door	•	•	–

GrandCru multi-temperature wine cabinets

The temperatures can be set differently for the upper zone and lower zone in the multi-temperature wine cabinets of the GrandCru range. Innovative climate technology is employed to create temperature layers, so that red or white wines, and even champagne, can be stored at perfect drinking temperatures.

Up to 182 bottles can be stored at serving temperature in these models. The wooden shelves are height-adjustable to accommodate the individual wine selections. The upper and lower temperature range is displayed digitally in the electronic control unit in the multi-temperature wine cabinets of the GrandCru range.

Ideal humidity via Lava stone
The humidity in the GrandCru models can be increased by via Lava stone.

Wooden shelves
The hand-made shelves in untreated wood are ideal for storing Bordeaux bottles safely. Storing the bottles in opposite directions on the pull-out shelves allows you full use of the capacity.

GrandCru multi-temperature wine cabinets

- Temperature range from +5 °C (bottom) to +18 °C (top)
- Electronic control system with 2 adjustable temperature ranges
- Door and temperature alarm
- Digital temperature display which can be read from the outside except WTes 4176
- Child Lock function
- Fresh air supply via activated charcoal filter
- Lava stone humidifying equipment
- Interior light, with separate switch in appliances with glazed door
- Height-adjustable wooden shelves
- High-quality SwingLine design
- Elegant slimline handle in the colour of the housing with integrated opening mechanism
- Vibration-free compressors
- Reversible doors
- Lockable door

GrandCru multi-temperature range	**WTes 4177** GrandCru	**WTes 4176** GrandCru	**WT 4177** GrandCru	**WT 4176** GrandCru
Gross capacity	409 litre	396 litre	409 litre	401 litre
0.75 litre bordeaux bottles, up to	173	173	173	182
Exterior dimensions in cm (h/w/d)	165.8/66/67.1	165.8/66/67.1	165.8/66/67.1	164.4/66/67.1
Energy consumption (in 365 days)	252 kWh	185 kWh	252 kWh	185 kWh
Housing/door	stainless steel/glazed door	stainless steel/full-panel door	Tinto/glazed door	Tinto/full-panel door
Temperature zones	6	6	6	6
Adjustable temperature range	+5 °C to +18 °C	+5 °C to +18 °C	+5 °C to +18 °C	+5 °C to +18 °C
Wooden shelves	5	5	5	5
Lockable door	•	•	•	•

Vinothek multi-temperature wine cabinets

- Temperature range from +5 °C (bottom) to +18 °C (top)
- Mechanical control system
- Door and temperature alarm
- Child Lock function
- Fresh air supply via activated charcoal filter
- Lava stone humidifying equipment
- Interior light in WT 4127
- Height-adjustable wooden shelves
- High-quality SwingLine design
- Vibration-free compressors
- Reversible doors
- Lock available for subsequent fitting

Vinothek multi-temperature range	**WT 4127** Vinothek	**WT 4126** Vinothek
Gross capacity	409 litre	401 litre
0.75 litre bordeaux bottles, up to	173	182
Exterior dimensions in cm (h/w/d)	165.8/66/67.1	164.4/66/67.1
Energy consumption (in 365 days)	282 kWh	207 kWh
Housing/door	Tinto/glazed door	Tinto/full-panel door
Temperature zones	6	6
Adjustable temperature range	+5 °C to +18 °C	+5 °C to +18 °C
Wooden shelves	5	5
Lockable door	available as accessory	available as accessory

Wine storage cabinets of the GrandCru range

Wine storage cabinets can be set to exactly the temperature required within the range of +5 °C to +20 °C. This ensures that the selected temperature is maintained constantly and uniformly throughout the interior. Our wine storage cabinets are ideal for storing wines for long periods of time to allow them to mature to perfection. Depending on what temperature the appliances are set to, they can also be used for keeping white wine or red wine at exactly the right temperature for serving.

The 66 cm-wide models of the GrandCru series can be set to temperatures between +5 °C and +20 °C. All the wine storage cabinets are also available with a tinted glazed door for stylish presentation.

Why are grape varieties blended?

Many people still see the blending of various types of grapes as an underhand practice or even as adulterating a wine. But this is not the case at all. Blending has a long tradition, particularly in France, where it is referred to as “assemblage”. There are several reasons for blending. Firstly, if wine were made from certain single varieties of grapes it might be one-dimensional, bland and possibly undrinkable. Blending is carried out to obtain a consistent quality and a harmonious, appealing wine.

Bordeaux wines are a good example of “assembly”. For red Bordeaux, the Cabernet Sauvignon, Merlot and Cabernet Franc varieties are mainly used. The Cabernet Sauvignon has a very pronounced tannin aroma and would probably be too strong to most people if it were used as a single grape variety. That is why the Cabernet is blended with the softer Merlot that has less tannin character. In this way the strong tannin structure of the Cabernet is toned down a little and the wine reaches maturity earlier. The Cabernet Franc gives the blend a perfect colour and a delicate spiciness. The individual components of the grape varieties form a unique whole that is achieved only when married together by blending.

GrandCru wine storage cabinets

- Ideal climate conditions thanks to forced air cooling and fresh air supply via activated charcoal filter
- Adjustable temperature range between +5 °C and +20 °C
- Electronic control
- Door and temperature alarm
- Digital temperature display which can be read from the outside except WK 4176
- Child Lock function
- Fresh air supply via activated charcoal filter
- Interior light, with separate switch in appliances with glazed door
- Height-adjustable wooden shelves
- High-quality SwingLine design
- Elegant slimline handle in the colour of the housing with integrated opening mechanism
- Vibration-free compressors
- Reversible doors
- Lockable door

GrandCru wine storage cabinets	WK 6476 GrandCru	WK 4677 GrandCru	WK 4676 GrandCru
Gross capacity	666 litre	462 litre	453 litre
0.75 litre bordeaux bottles, up to	312	187	193
Exterior dimensions in cm (h/w/d)	193/74.7/78.6	185.5/66/67.1	184.1/66/67.1
Energy consumption (in 365 days)	143 kWh	217 kWh	118 kWh
Housing/door	Tinto/full-panel door	Tinto/glazed door	Tinto/full-panel door
Temperature zones	1	1	1
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C	+5 °C to +20 °C
Wooden shelves	6	6	6
Lockable door	•	•	•

Electronic control system
The wine storage cabinets of the GrandCru range are equipped with an accurate electronic control system with digital temperature display. With this control system the temperatures can be set to the degree required in the range of +5 °C to +20 °C. The current temperature of the interior can be read from the outside.

GrandCru wine storage cabinets	WKes 4177 GrandCru	WKes 4176 GrandCru	WK 4177 GrandCru
Gross capacity	403 litre	390 litre	403 litre
0.75 litre bordeaux bottles, up to	162	162	162
Exterior dimensions in cm (h/w/d)	165.8/66/67.1	165.8/66/67.1	165.8/66/67.1
Energy consumption (in 365 days)	209 kWh	112 kWh	209 kWh
Housing/door	stainless steel/glazed door	stainless steel/full-panel door	Tinto/glazed door
Temperature zones	1	1	1
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C	+5 °C to +20 °C
Wooden shelves	5	5	5
Lockable door	•	•	•

GrandCru wine storage cabinets

- Ideal climate conditions thanks to forced air cooling and fresh air supply via activated charcoal filter
- Adjustable temperature range between +5 °C and +20 °C
- Electronic control
- Door and temperature alarm
- Digital temperature display which can be read from the outside
- Child Lock function
- Fresh air supply via activated charcoal filter
- Interior light, with separate switch in appliances with glazed door
- LED interior light with WKes 653
- Height-adjustable wooden shelves except WKes 653 and WK 1853
- Drawer for accessories with WKes 653
- High-quality SwingLine design with WK 2977, WK 2976 and WK 4176
- Elegant slimline handle in the colour of the housing with integrated opening mechanism with WK 2977, WK 2976 and WK 4176
- Vibration-free compressors
- Reversible doors except WKes 653
- Lockable door except WK 1853
- Pull-out grid shelves with front wooden panel on telescopic rails with WK 1853

GrandCru wine storage cabinets	WK 4176 GrandCru	WK 2977 GrandCru	WK 2976 GrandCru
Gross capacity	395 litre	285 litre	281 litre
0.75 litre bordeaux bottles, up to	168	108	114
Exterior dimensions in cm (h/w/d)	164.4/66/67.1	126.4/66/67.1	125/66/67.1
Energy consumption (in 365 days)	112 kWh	171 kWh	107 kWh
Housing/door	Tinto/full-panel door	Tinto/glazed door	Tinto/full-panel door
Temperature zones	1	1	1
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C	+5 °C to +20 °C
Wooden shelves	5	4	4
Interior light	•	•	•
Lockable door	•	•	•

The **drawer** of the WKes 653 is ideal for storing wine accessories or wine accompaniments such as chocolate or candies.

All the functions of the WKes 653 can be simply and conveniently operated at the touch of a finger on the **electronic Touch panel**. The temperature is indicated in the control display.

GrandCru wine storage cabinets	WK 1853 GrandCru	WKes 653 GrandCru
Gross capacity	153 litre	56 litre
0.75 litre bordeaux bottles, up to	59	12
Exterior dimensions in cm (h/w/d)	85/59.7/58.6	61.2/42.5/47.8
Energy consumption (in 365 days)	189 kWh	122 kWh
Housing/door	Tinto/glazed door	stainless steel/glazed door
Temperature zones	1	1
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C
Wooden shelves	–	3
Grid shelves galvanised	3	–
Interior light	•	•
Lockable door	–	•

Wine storage cabinets of the Vinothek range

Liebherr's large range of wine storage cabinets caters for a wide spectrum of storage requirements. In addition to the appliances in the GrandCru range, the wine storage cabinets also come in the Vinothek line.

The permanent supply of fresh air through activated charcoal filters and re-circulated air cooling both ensure a consistently high air quality in these appliances to help the wines progress safely to maturity. Specially developed compressors ensure that the wines are stored undisturbed in peace and quiet.

Vinothek wine storage cabinets
- Ideal climate conditions thanks to forced air cooling and fresh air supply via activated charcoal filter
- Mechanical control
- Interior light, with separate switch with WK 4127, WK 1802 and WK 2927
- Fresh air supply via activated charcoal filter
- Vibration-free compressors
- Reversible doors

WK 4127, WK 4126 and WK 2927, WK 2926 Vinothek
- Digital temperature display
- Height-adjustable wooden shelves
- Lock subsequently
- High-quality SwingLine design

WK 1802 and WK 1806 Vinothek
- Analogue display
- Height-adjustable bottle shelves
- Lockable door
- HardLine design

Vinothek wine storage cabinets	WK 4127 Vinothek	WK 4126 Vinothek
Gross capacity	403 litre	395 litre
0.75 litre bordeaux bottles, up to	162	168
Exterior dimensions in cm (h/w/d)	165.8/66/67.1	164.4/66/67.1
Energy consumption (in 365 days)	288 kWh	209 kWh
Housing/door	Tinto/glazed door	Tinto/full-panel door
Temperature zones	1	1
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C
Wooden shelves	5	5
Interior light	•	–
Lockable door	available as accessory	available as accessory

Ideal humidity
With 50%–80% humidity, Liebherr's wine storage cabinets guarantee the perfect conditions needed for keeping the corks supple and allowing wine to breathe during the maturing process. The fresh air supplied through the easily replaceable activated charcoal filter and the recirculated air cooling system ensure optimal air quality – this is crucially important for the maturing process and preservation of the wines.

Vinothek wine storage cabinets	WK 2927 Vinothek	WK 2926 Vinothek	WK 1802 Vinothek
Gross capacity	285 litre	281 litre	174 litre
0.75 litre bordeaux bottles, up to	115	119	68
Exterior dimensions in cm (h/w/d)	126.4/66/67.1	125/66/67.1	88.9/60/60.5
Energy consumption (in 365 days)	248 kWh	207 kWh	248 kWh
Housing/door	Tinto/glazed door	Tinto/full-panel door	Tinto/glazed door
Temperature zones	1	1	1
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C	+5 °C to +20 °C
Wooden shelves	3	3	–
Grid shelves galvanised	–	–	3
Interior light	•	–	•
Lockable door	available as accessory	available as accessory	•
			with full-panel door as **WK 1806**

Attractive and convenient

Multi-temperature wine cabinets and wine storage cabinets not only offers the benefit of innovative climate technology, engineered specifically for storing wines, but they also bring together premium quality equipment with a classical, elegant design.

All the Vinidor appliances feature an innovative **LED lighting concept**. There is LED lighting in each temperature zone, integrated in the ceiling and in the insulation plates. This advanced technology ensures uniform illumination throughout the interior. Since any heat generated by the LEDs is minimal, wines can be presented, bathed in light, for a longer time period.

The wine storage cabinets from Liebherr have an **activated charcoal filter**, which can be easily changed, that purifies the incoming fresh air to obtain the optimum odour-free quality. Each wine compartment in the Vinidor appliances range has an activated charcoal filter of its own.

Accurately maintaining the right temperature is vital for wine to reach optimum maturity. The precision **electronic Touch control system** allows the temperature to be regulated to exactly the degree wanted ranging between +5 °C and +20 °C. All the functions can be simply and conveniently operated at the touch of a finger on the electronic Touch panel. The temperature is indicated in the control display.

The Vinidor range features secure, wooden pull-out shelves providing a good overview and convenient access to the bottles. The **handmade shelves** crafted from untreated wood are ideal for storing bottles of Bordeaux safely. Storing the bottles in opposite directions on the pull-out shelves allows full use of the capacity.

The two built-in appliances WTI 2050 and WTEes 2053 come with **half-folding wooden shelves** for presenting wines or storing open bottles.

The Vinidor range
- Ideal climate conditions in each compartment thanks to forced air cooling and fresh air supply via activated charcoal filter
- Electronic control in the insulation panels
- Door and temperature alarm
- Digital temperature display which can be read from the outside
- Child Lock function
- Variable humidity control
- Dimmable LED interior light with separate switch
- Pull-out wooden shelves on telescopic rails
- Vibration-free compressors
- Reversible doors

WTEes 2053 and WTI 2050 Vinidor
- 2 temperature zones, each adjustable between +5 °C and +20 °C
- 2 folding wooden pull-out shelves for presentation or for storing open bottles
- SoftSystem
- Frame of glass door in the colour of the housing with WTEes 2053

WTUes 1653 Vinidor
- 2 temperature zones, each adjustable between +5 °C and +20 °C
- Tinted glazed door with high-quality stainless steel frame
- Stainless steel handle

GrandCru wine storage cabinet
- Ideal climate conditions thanks to forced air cooling and fresh air supply via activated charcoal filter
- Temperature range adjustable between +5 °C and +20 °C
- Electronic control
- Door and temperature alarm
- Digital temperature display which can be read from the outside
- Child Lock function
- Vibration-free compressors

WKUes 1753 GrandCru
- 4 storage shelves, 3 of which are wooden pull-out grid shelves with front wooden panel
- Interior light, with separate switch
- Reversible doors
- Elegant slimline handle
- Can be fitted under worktop; height of plinth can be adjusted by 50 mm with adjustable feet; ventilation and air extraction through the plinth, so no ventilation grill necessary in the work surface
- Tinted glazed door with high-quality stainless steel frame

WKEes 553 GrandCru
- Electronic Touch panel
- 3 storage shelves, 2 of which are wooden pull-out grid shelves with front wooden panel
- LED interior light
- Reversible doors
- Tinted glazed door with high-quality stainless steel frame

The Vinidor range	WTEes 2053 Vinidor, Built-in appliance, 122	WTI 2050 Vinidor, Built-in appliance, 122	WTUes 1653 Vinidor, Under-worktop appliance, 82–87
Gross capacity	195 litre	195 litre	127 litre
0.75 litre bordeaux bottles, up to	64	64	38
Exterior dimensions in cm (h/w/d)	122.1–122.5/56–57/min. 55	122–123.6/56–57/min. 55	82–87/60/min. 58
Energy consumption (in 365 days)	207 kWh	176 kWh	251 kWh
Housing/door	silver/glazed door	silver/full-panel door	silver/glazed door
Temperature zones	2	2	2
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C	+5 °C to +20 °C
Pull-out wooden shelves	4	4	3
Lockable door	–	–	•
SoftSystem	•	•	–

GrandCru wine storage cabinets	WKUes 1753 GrandCru, Under-worktop appliance, 82–87	WKEes 553 GrandCru, Built-in appliance, 45
Gross capacity	144 litre	48 litre
0.75 litre bordeaux bottles, up to	59	18
Exterior dimensions in cm (h/w/d)	82–87/60/min. 58	45/56/min. 55
Energy consumption (in 365 days)	179 kWh	130 kWh
Housing/door	silver/glazed door	glazed door
Temperature zones	1	1
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C
Total storage shelves	4	3
Interior light	•	•
Lockable door	•	–

cm = Aperture dimensions

Wine cabinets for presenting, serving wine by the glass and storage

The GWT(es) 4677 and GWT(es) 4577 Vinidor appliances and the GWUes 1753 GrandCru model are designed especially for professional use. These appliances not only provide the perfect temperature conditions for enjoying wine at its best, but also combine attractive presentation with practical storage for wines served by the glass.

The practical **presentation shelf** of the GWT(es) 4677 Vinidor models fulfills both bottle storage and bottle presentation functions. The bottles can **be stored horizontally** at the rear.

The Vinidor appliances feature the innovative LED lighting concept. There is **LED lighting** in each temperature zone, integrated in the ceiling and in the insulation plates. Since minimal heat is generated by the LEDs, wines can be presented bathed in light over a lengthy period.

In the GWT(es) 4677 and GWT(es) 4577 Vinidor appliances, the **electronic control system** is integrated in the insulation plate. The zones above and beneath can be set independently of each other to three different temperatures ranging between +5 °C and +20 °C.

The practical **presentation shelf** of the GWT(es) 4677 Vinidor models fulfills both bottle storage and bottle presentation functions. The bottles can be stored horizontally at the rear.

Wine cabinets for presentating and serving wine by glass
- Forced-air cooling, fresh air supply via activated charcoal filter in each safe
- Electronic control
- Door and temperature alarms
- Digital temperature display, readable from outside
- Child lock
- Humidity control via optionally activatable ventilation
- Vibration-free compressors
- Interchangeable door hinges
- Tinted insulated glass door, glass door frame in housing colour
- Elegant slimline handle in the colour of the housing
- Lockable door

GWT(es) 4677 Vinidor
- 3 temperature zones, each separately adjustable between +5 °C and +20 °C
- A presentation board and a Pull-out shelf for upright bottles
- Wooden pull-out shelves mounted on telescopic rails
- Dimmable LED interior light with separate switch
- High-quality SwingLine design

GWT(es) 4577 Vinidor
- 2 temperature zones, each separately adjustable between +5 °C and +20 °C
- Two pull-out shelves for upright bottles
- Wooden pull-out shelves mounted on telescopic rails
- Dimmable LED interior light with separate switch
- High-quality SwingLine design

Under-worktop appliance
GWUes 1753 GrandCru
- Temperature range settable between +5°C and +20°C
- Pull-out shelf for upright bottles
- Dimmable LED interior lighting with separate switch
- HardLine design
- Built-under: can be fitted under worktop: height of plinth can be adjused by 50 mm with adjustable feet; ventilation and air extraction through the plinth, so no ventilation grill necessary in the work surface

Wine storage cabinet
GWK 6476 Vinidor
- Temperature range adjustable between +5°C and +20°C
- Height-adjustable grid shelves
- Interior lighting
- High-quality SwingLine design

Wine cabinets	**GWTes 4677** Vinidor	**GWT 4677** Vinidor	**GWTes 4577** Vinidor	**GWT 4577** Vinidor
Gross capacity	430 litre	430 litre	486 litre	486 litre
0.75 litre bordeaux bottles, up to	117	117	112	112
Exterior dimensions in cm (h/w/d)	185.5/66/67.1	185.5/66/67.1	185.5/66/67.1	185.5/66/67.1
Energy consumption (in 365 days)	394 kWh	394 kWh	284 kWh	284 kWh
Housing/door	Stainless steel/glazed door	Tinto/glazed door	Stainless steel/glazed door	Tinto/glazed door
Temperature zones	3	3	2	2
Adjustable temperature range	+5 °C to +20 °C	+5 °C to +20 °C	+5 °C to +20 °C	+5 °C to +20 °C
Total storage shelves	8	8	8	8

GWUes 1753 GrandCru Under-worktop appliance (82–87)	**GWK 6476** GrandCru
144 litre	666 litre
36	312
82–87/60/min. 58	193/74.4/78.6
179 kWh	143 kWh
Silver/glazed door	Tinto/full-panel door
1	1
+5 °C to +20 °C	+5 °C to +20 °C
2	7

cm = Aperture dimensions